



Kris-Tech Wire Co.

Copper Clad Steel Tracer Wire



Scope:
Single conductor copper clad steel, HMWPE (high molecular weight polyethylene) insulated tracer/locator wire. Together with the high strength of steel, the electrical and corrosion resistant properties of copper and the rugged properties of HMWPE this product is suitable for direct burial use in wet and dry locations, designed to carry an electrical signal for use in locating underground non-metallic pipe. Versions available in 30 volt, 600 volt and 1000 volt.



Applicable Standards and Tests:
ASTM B-227, B-869, B-910/B-910M all for Copper Clad Steel. ASTM D-1248, ICEA S-70-547, ICEA S-61-402/NEMA WC5, ICEA S-95-658/NEMA WC70, UL 83, UL 1581 All products are spark tested at 7500 VAC unless otherwise specified.




Construction:
Conductors: The single conductors 21% conductivity copper clad steel, dead soft annealed (DSA), stress relieved (SR), high strength (HS) and extra high strength (EHS). Other conductivities and break strengths available by request.


Insulation:
Concentrically applied HMWPE insulation in accordance with UL83. High Density HMWPE is available upon request.



Identification and Packaging:
Custom and standard print legends are available. 500 ft/spl.packed 4/box, or 2500 feet/spl spools are standard and packaged and labeled with product name, description, AWG, and manufacturer. Custom lengths, non-standard colors, AWG and custom packaging are available by request.

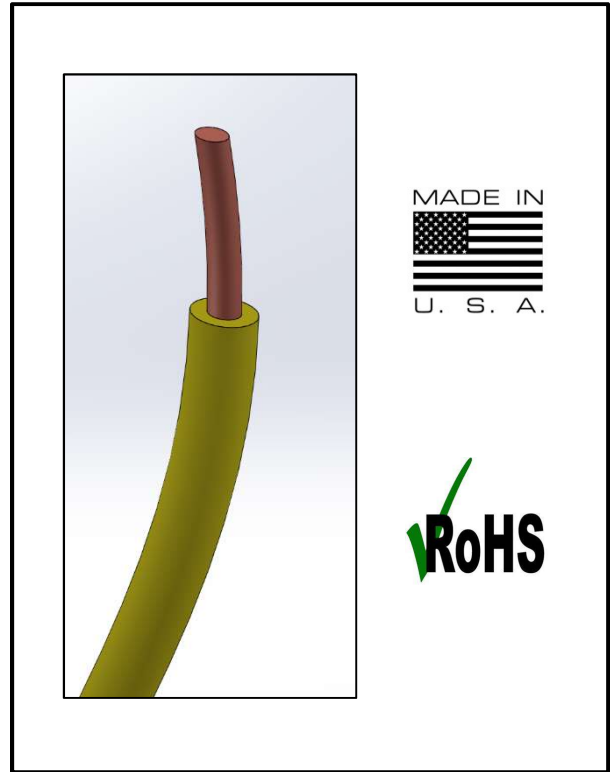

AWG	Breaking Pounds DSA/SR/HS/EHS	Bending Radius (inches)	Insulation Thickness (Inches) 30/600/1KV	Nominal Overall Diameter – Inches	Approx. Shipping Weight (Lbs/Mft)
18	63 / 79 / NA / NA	0.64	0.030 / 0.045 / 0.060	0.10 / 0.13 / 0.16	7 / 9 / 12
16	99 / 125 / NA / NA	0.68	0.030 / 0.045 / 0.060	0.11 / 0.14 / 0.17	10 / 13 / 16
14	161 / 187 / 351 / NA	0.72	0.030 / 0.045 / 0.060	0.12 / 0.15 / 0.18	15 / 18 / 21
12	256 / 303 / 558 / 1185	0.80	0.030 / 0.045 / 0.060	0.14 / 0.17 / 0.20	22 / 25 / 29
10	408 / 473 / 887 / 1940	0.88	0.030 / 0.045 / 0.060	0.16 / 0.19 / 0.22	34 / 37 / 41
8	628 / 950 / 1005 / 2785	1.00	0.030 / 0.045 / 0.060	0.19 / 0.22 / 0.25	51 / 55 / 60

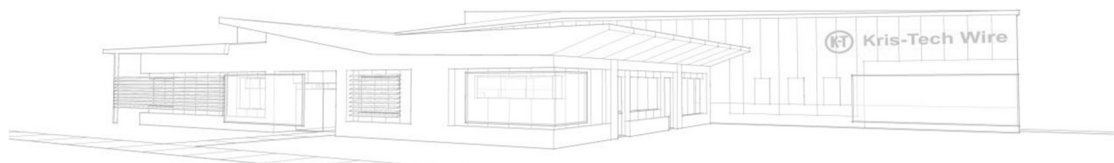

P: (315) 339 5268 • F: (315) 339-5277 • sales@kristechwire.com • www.kristechwire.com

Spec: Tracer-CCS
Issued: 05/03/19
Supersedes: 11/21/16